




CORDOBA LED U1/U2 3.0

Vorteile

- Hohe Lichtausbeute bis 160lm/W
- Solides Gehäuse aus Aluminium
- Markenkomponenten
- 12V/24V-Leuchte

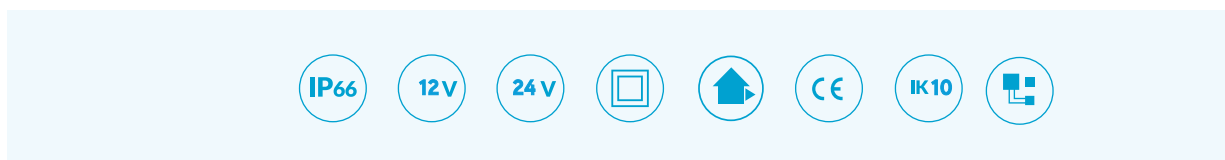

Cordoba LED U1 3.0 1

	P			Ra	IP		
CRD3U1.10.025.7C3000	25	3400-3500	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.10.025.7C4000	25	3600-3700	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.10.025.7C5700	25	3450-3550	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg









Cordoba LED U1 3.0 2

	P			Ra	IP		
CRD3U1.20.037.7C3000	37	5200-5300	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.20.037.7C4000	37	5500-5600	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.20.037.7C5700	37	5200-5400	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg









Cordoba LED U1 3.0 3

	P			Ra	IP		
CRD3U1.30.043.7C3000	43	6100-6200	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.30.043.7C4000	43	6400-6500	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U1.30.043.7C5700	43	6100-6250	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg









Cordoba LED U2 3.0 1

							
CRD3U2.10.024.7C3000	24	3400-3500	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.10.024.7C4000	24	3600-3700	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.10.024.7C5700	24	3450-3550	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg


Cordoba LED U2 3.0 2

							
CRD3U2.20.035.7C3000	35	5200-5300	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.20.035.7C4000	35	5500-5600	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.20.035.7C5700	35	5200-5400	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg

Cordoba LED U2 3.0 3


							
CRD3U2.30.041.7C3000	41	6100-6200	3000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.30.041.7C4000	41	6400-6500	4000K	>80	IP66	80°x15°, 67°x47°	4,0kg
CRD3U2.30.041.7C5700	41	6100-6250	5700K	>70	IP66	80°x15°, 67°x47°	4,0kg

Abmessungen und Logistik

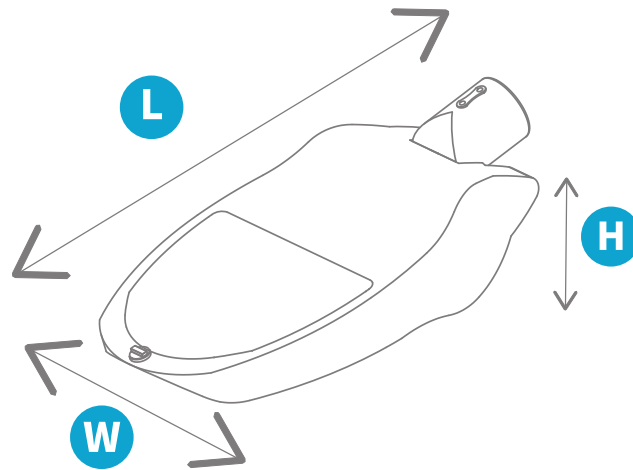


	H	L	W				
CRD3U (I-III)	125	476	248	CRD3U (I-III)	1	48	120x80



Montageart

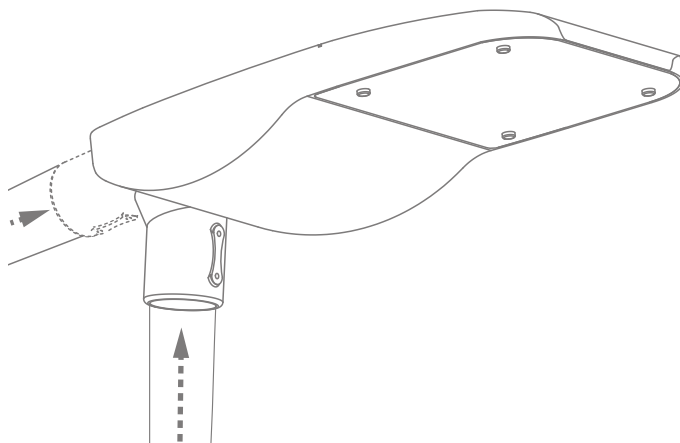

Pfosten Montage



Lichtstärke

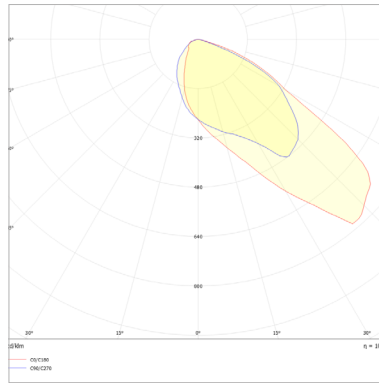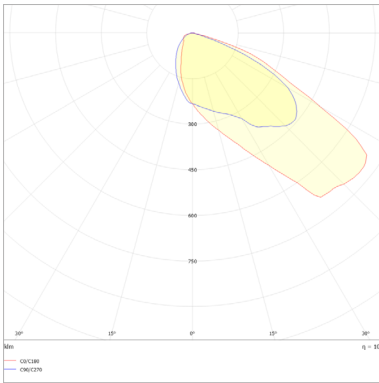

Verfügbare Konfigurationen

Familie	Leistungs- version	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahl- winkel	Lichtsteu- erung	Betriebstem- peratur [°C]	Garantie	Modifikati- onen
CRD3U1 Cordoba LED 12VDC 3.0	1	0 Standard	024 24W	7 >70	C High Power OSRAM GW P9LR35,PM Gen5	3000 3000K	1 PMMA	G11 Gehärtetes Glas transparent	067047 67°x47°	00 ON/OFF	4040 -40°C;40°C	03Y 3 Jahre	0000 Standard
	2		025 25W			4000 4000K			080x015 80°x15°				
CRD3U2 Cordoba LED 24VDC 3.0	2		035 35W			5700 5700K							E002 Schutzklas- se II
	3		037 37W										
	3		041 41W										
	3		043 43W										

Beispiel-Produktcode:

CRD3U1.20.037.7C3000.1G11.067047.00.4040.03Y.0000