

InTUBON LED 2.0



Vorteile

- hohe Schlagfestigkeit IK10
- Hohe Lichtausbeute bis 160lm/W
- Schnelle und einfache Montage
- Markenkomponenten



IP69K

IK10



InTUBON LED 2.0 1



P



Ra

IP



ITB2ST.10.024.8A4000

24

3850

4000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.024.8A5000

24

3950

5000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.030.8A4000

30

4750

4000K

>80

IP69K

90°X90° 60°X60°

1,8kg

ITB2ST.10.030.8A5000

30

4850

5000K

>80

IP69K

90°X90° 60°X60°

1,8kg

InTUBON LED 2.0 2



P



Ra

IP



ITB2ST.20.036.8A4000

36

5750

4000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.036.8A5000

36

5850

5000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.045.8A4000

45

7150

4000K

>80

IP69K

90°X90° 60°X60°

2,2kg

ITB2ST.20.045.8A5000

45

7250

5000K

>80

IP69K


90°X90° 60°X60°

2,2kg

Um die genauen Lichtparameter für den ausgewählten Abstrahlwinkel zu ermitteln, müssen die photometrischen Dateien für den angegebenen Abstrahlwinkel verwendet werden. Download-Link: [LDT-LUXON-LED.zip](#)

InTUBON LED 2.0 3

	P			Ra	IP		
ITB2ST.30.048.8A4000	48	7700	4000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.048.8A5000	48	7800	5000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.060.8A4000	60	9500	4000K	>80	IP69K	90°X90° 60°X60°	2,6kg
ITB2ST.30.060.8A5000	60	9600	5000K	>80	IP69K	90°X90° 60°X60°	2,6kg

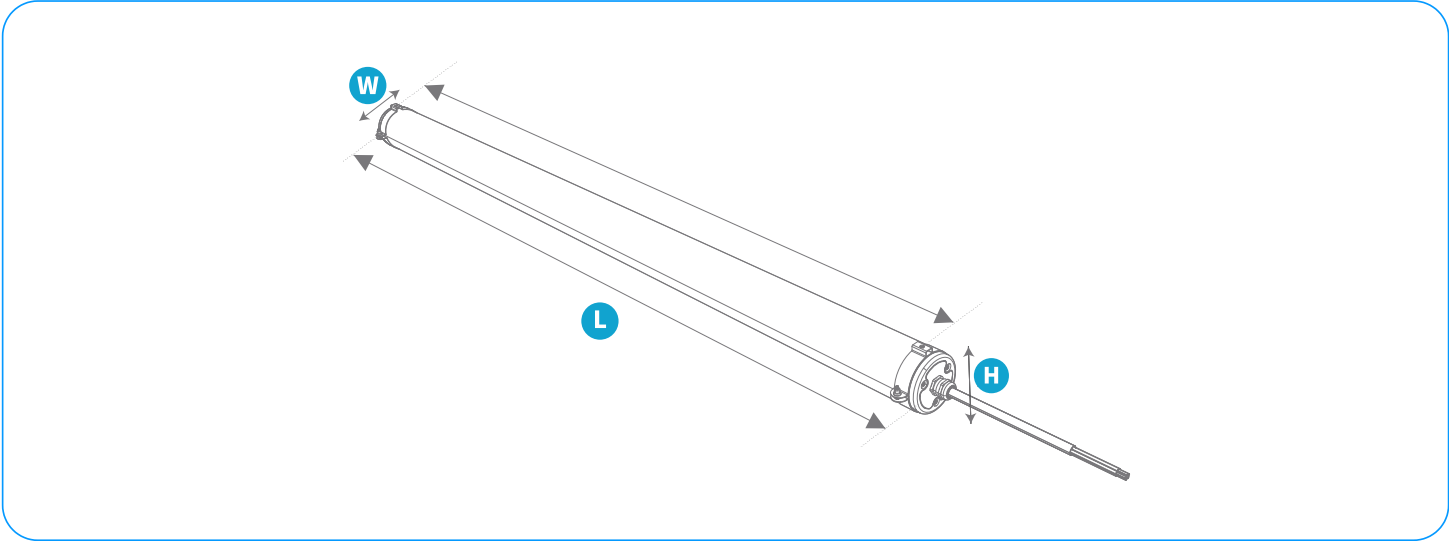

	H	W	L
ITB2ST.1	70	70	720
ITB2ST.2	70	70	1000
ITB2ST.3	70	70	1280

Montageart




Deckenaufbau




Seilabhängung



Lichtstrom

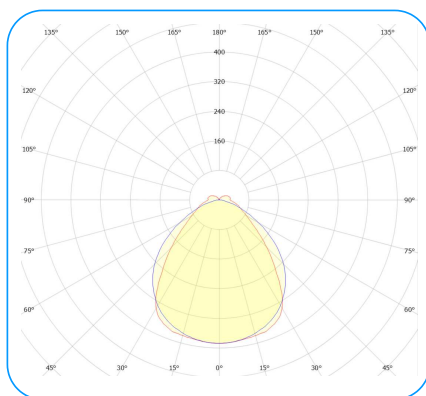

90°X90°

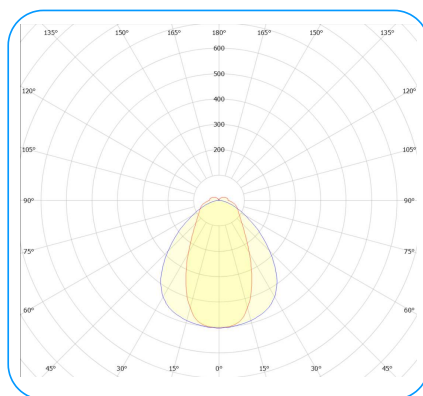

60°X60°

Verfügbare Konfigurationen

Familie	Leistungsvariante	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahlwinkel	Lichtsteuerung	Betriebstemperatur [°C]	Garantie	Modifikationen
ITB2ST InTUBON LED 2.0	1 1	0 Standard	024 24W	8 >80	A Mid Power	4000 4000K	2 PC Linse	P21 PC Diffusor Transparent	060060 60°x60°	00 On/Off	2540 -25°C+40°C	05Y 5 Jahres	0000 Keine
	2 2		030 30W			5000 5000K			090090 90°x90°	D0 DALI	3550 -35°C+50°C	08Y 8 Jahres	E001 Durchgangs version
	3 3		036 36W									10Y 10 Jahres	F004 Outdoor version
			045 45W										
			048 48W										
			060 60W										

Beispiel-Produktcode

ITB2ST.10.024.8A4000.2P21.090090.00.2540.05Y.0000