

Intubon LED 3.0



Vorteile

- Hohe Dichtheit IP69K
- hohe Schlagfestigkeit IK10
- Hohe Lichtausbeute bis 150lm/W
- Schnelle und einfache Montage
- Keine sichtbaren Lichtpunkte



IP69K

IK10




Intubon LED 3.0 1

	P			Ra	IP		
ITB3ST.10.019.8A4000	19	2850	4000K	>80	IP69K	135°X105°	1,4kg
ITB3ST.10.029.8A4000	29	4200	4000K	>80	IP69K	135°X105°	1,4kg
ITB3ST.10.044.8A4000	44	6200	4000K	>80	IP69K	135°X105°	1,4kg
ITB3ST.10.058.8A4000	58	8650	4000K	>80	IP69K	135°X105°	1,4kg


Intubon LED 3.0 2

	P			Ra	IP		
ITB3ST.20.035.8A4000	35	5250	4000K	>80	IP69K	135°X105°	1,8kg
ITB3ST.20.060.8A4000	60	8550	4000K	>80	IP69K	135°X105°	1,8kg
ITB3ST.20.073.8A4000	73	10850	4000K	>80	IP69K	135°X105°	1,8kg

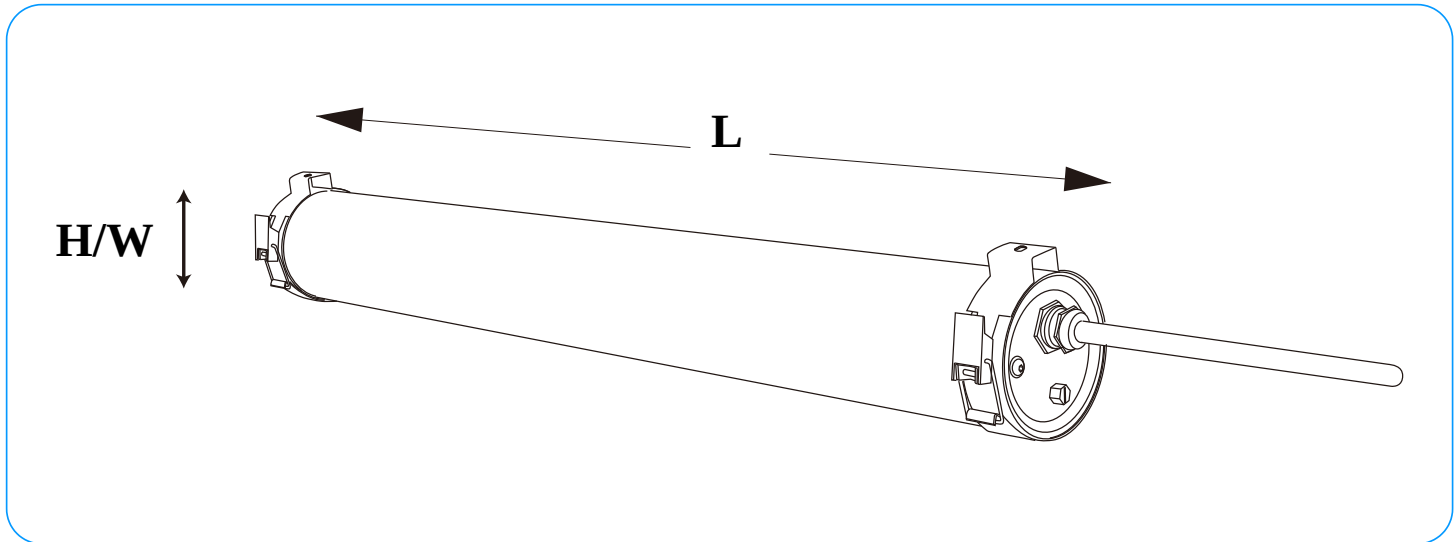


		H	W	L
STANDARD DALI	ITB3ST.1	73 73	73 73	1170 1170
STANDARD DALI	ITB3ST.2	73 73	73 73	1495 1495

Montageart

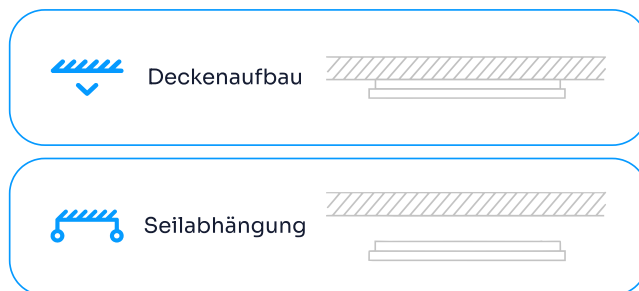

Lichtstrom

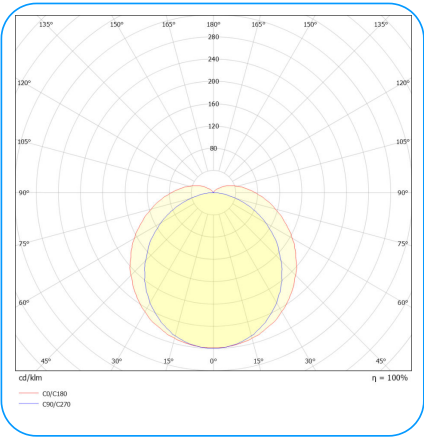

135°X105°

Verfügbare Konfigurationen

Familie	Leistungsvariante	Version	Nennleistung [W]	CRI	Typ der Diode	CCT [K]	Material der Linse	Material des Diffusors	Abstrahlwinkel	Lichtsteuerung	Betriebstemperatur [°C]	Garantie	Modifikationen
ITB3ST Intubon LED 3.0	1 1	0 Standard	019 19W	8 >80	A Mid Power	4000 4000K	0 Keine Linse	P23 PC Diffusor Matt	135105 135°x105°	00 On/Off	2540 -25°C÷+40°C	05Y 5 Jahres	0000 Keine
	2 2		029 29W							D0 DALI	3545 -35°C÷+45°C	08Y 8 Jahres	
			035 35W								3550 -35°C÷+50°C	10Y 10 Jahres	
			044 44W										
			058 58W										
			060 60W										
			073 73W										

Beispiel-Produktcode

ITB3ST.10.019.8A4000.OP23.135105.00.2540.05Y.0000

Fotogalerie

